


A: 103mm
 B: 107mm
 C: 124mm
 D: 80mm
 E: 60mm

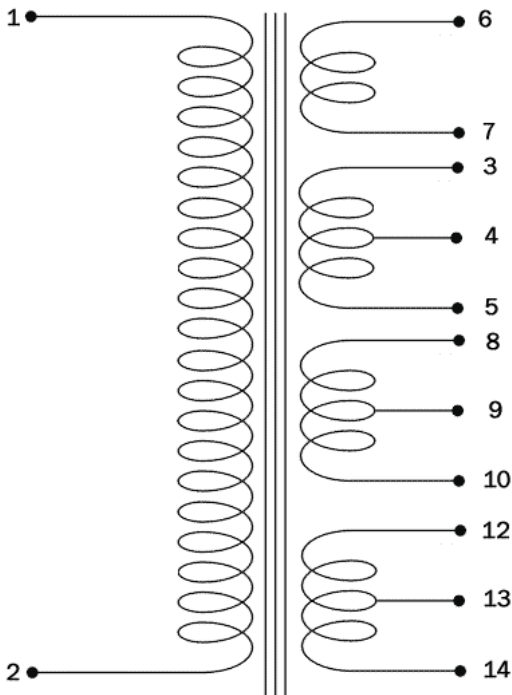

RETE/50Hz		BIAS	
1	230V	60V	6
2		100mA	7
		0	
		ANODICA	
		180V	8
		300mA CT	9
		180V	10
		FILAMEN- TI	
		3,15V	12
		6A CT	13
		3,15V	14
AUX			
3	12V		
4	CT 2A		
5	12V		

Power Trasformer mod.	Primary	Secondary	Replacement
TA34M52	230	180-0-180 / 60-0 / 3.15-0-3.15 / 12-0-12	

Dimensions (HxWxD):	Weight (Kg.):	Mount: vertical
---------------------	---------------	------------------------

Nucleo centrale lamierini (colonna x altezza pacco lamierini)	mm	40x36
Sezione nucleo centrale	cm2	12,97
Induzione magnetica	W/m2	1,2
f.e.m.i. in una spira	V	0,345
Rendimento del trasformatore	n	0,85
Caduta di tensione percentuale	V%	2,92
Frequenza di lavoro	Hz	50
Potenza assorbita dal primario	VA	190
Potenza disponibile al secondario	VA	170

NOTE: