


A: 125mm
 B: 105mm
 C: 78mm
 D: 36mm

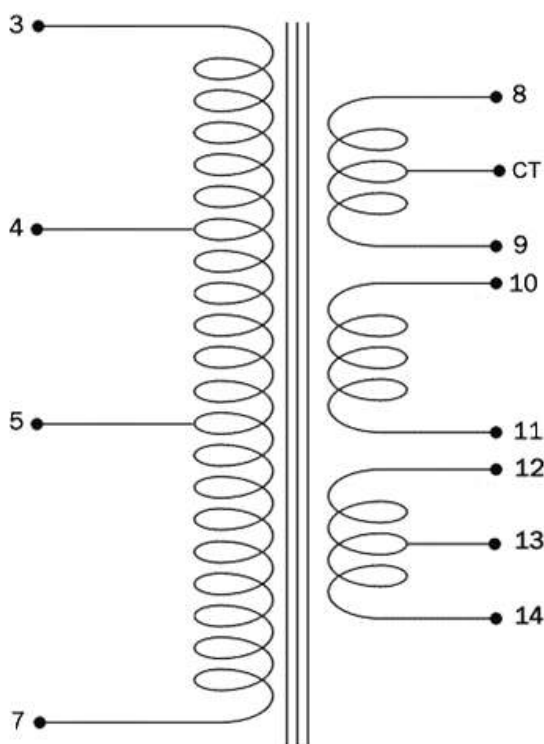

			ANODICA	
		350V	○ Purple	
		C.T. 0,2A	○ Grey	
		350V	○ Purple	
			BIAS	
		50V 0,18A	○ Pink	
			○ Pink	
			FILAMENTI	
		3,15V	○ Brown	
		6A CT	○ Black	
		3,15V	○ Brown	
RETE/50Hz				
White	○	240V		
Blue	○	230V		
Pink	○	115V		
Brown	○	comune		

Power Trasformer mod.	Primary	Secondary	Replacement
TADR504	115-230-240	350V-0-350V, 0-50V, 3.15-0-3.15	Hiwatt DR504

Dimensions (HxWxD):	Weight (Kg):	Mount: vertical
---------------------	--------------	-----------------

Nucleo centrale lamierini (colonna x altezza pacco lamierini)	mm	40 x 36
Sezione nucleo centrale	cm ²	12,97
Induzione magnetica	W/m ²	1,2
f.e.m.i. in una spira	V	0,345
Rendimento del trasformatore	n	0,85
Caduta di tensione percentuale	V%	2,94
Frequenza di lavoro	Hz	50
Potenza assorbita dal primario	VA	163
Potenza disponibile al secondario	VA	140

NOTE: